



深圳市神牛摄影器材有限公司

地址: 深圳市宝安区福海街道塘尾社区耀川工业区厂房2栋
电话: 0755-29609320(8062) 传真: 0755-25723423 邮箱: godox@godox.com

GODOX Photo Equipment Co., Ltd.

Add: Building 2, Yaochuan Industrial Zone, Tangwei Community, Fuhai Street,
Bao'an District, Shenzhen 518103, China Tel: +86-755-29609320(8062)
Fax: +86-755-25723423 E-mail: godox@godox.com

godox.com

Made in China



Godox

专业影室闪光灯
Professional Studio Flash

QSII Series



说明手册
Instruction Manual

FOREWORD

Thanks for choosing QSII series studio flash. It is a durable and high-performance strobe with complete functions to help professional photographers create desired lighting effects. This product is suited for wedding, advertisement, portrait, and fashion photography. The perfect light source and a Must in studios and photo workshops! The QSII flash offers:

- Built-in Godox 2.4G wireless X system
- Precise output displayed on LCD panel, 50 steps from 1/32 to 1/1 (or 5.0-10.0) in 0.1 increments.
- High-qualified modeling lamp, 150W output and 5% to 100% manual light adjustment
- Outstanding output stability, a tolerance of $\leq 2\%$ under the same output
- Anti-preflash function, enabling synchronization with cameras having a one-preflash firing system
- Adjusted parameters intelligently remembered after 3s and automatically recovered after a restart
- Wireless control of the flash power ratio, the on-and-off of modeling lamp and buzzer, as well as flash triggering with Godox X1, XT16 or FT-16 flash trigger.

CONTENTS

09	Foreword	15	• Slave Trigger Model
10	Warning	15	• Buzz Function
10	Caution	15	• Key Combination
11	Names of Parts	15	• Alarm Display
11	• Body	15	• Memory Function
12	• LCD Panel	16	• Wireless Control Function
12	• Accessories	17	• Tube Replacement
12	• Separately Sold Accessories	18	Technical Data
13	Operations	18	Maintenance
13	• Flash Preparation		
13	• Power Connection		
13	• Modeling Lamp		
14	• Power Output Control		
14	• Test Button		
14	• Sync Triggering		
14	• GR/CH Button		

Warning

To prevent damage to the product or injury to you or to others, read the following warnings in their entirety before using this product. Keep these safety instructions where users can read them for ready reference.

- ▲ Do not disassemble or modify. Should the product break down, send the defective back to the authorized service center for inspection and maintenance.
- ▲ Keep dry. Do not handle with wet hands, immerse in water, or expose to rain.
- ▲ Keep out of reach of children.
- ▲ Please put the device in a ventilation environment and keep the parts of lighting and heat dissipation holes are unobstructed. Do not use in flammable environment.
- ▲ As this product adopts make and break device, please keep it easy to be used. No touching the heating parts of this product.
- ▲ Please turn off the power and wear insulated gloves before installing and connecting accessories. When replacing the tube or modeling lamp, please make sure that the tube is cool and wear insulated gloves to prevent burns.
- ▲ Do not flash directly towards naked eyes (especially those of babies), otherwise it may lead to visual impairment.
- ▲ Disconnect from the power supply when it will not be used for an extended period.
- ▲ The apparatus shall not be exposed to tripping or splashing and that no objects filled with liquids, such as vases, shall be placed on the apparatus;
- ▲ An apparatus with CLASS I construction shall be connected to a MAINS socket outlet with a protective earthing connection;
- ▲ The MAINS plug or an appliance coupler is used as the disconnect device, the disconnect device shall remain readily operable;
- ▲ Apparatus shall not be exposed to tripping or splashing and that no objects filled with liquids, such as vases, shall be placed on the apparatus;
- ▲ The lamp shall be changed if it has become damaged or thermally deformed;
- ▲ The luminaire is intended for professional use only;
- ▲ If the external flexible cable or cord of this luminaire is damaged, it shall be replaced by a special cord or cord exclusively available from the manufacturer or his service agent.

CAUTION

- ▲ After 30 continuous flashes at full power, the flash should be cooled down for about 3 minutes. Overheating will occur if it is used continuously without cooling down.
- ▲ Do not keep using the modeling lamp for a long time; otherwise flammable accessories attaching to flash head, e.g. softbox will get burnt. A 10-minute time is recommended in this case. After 10 minutes, cool it down for 1 minute.
- ▲ When using a snoot, do not keep the modeling lamp on for a long time or fire too frequently (not over six times for one minute). Overheating will result in damages for strobe housing and/or studio light.
- ▲ Avoid sudden impacts as this can damage the flash tube and/or modeling lamp.


NAMES OF PARTS

• Body



- | | |
|---------------------------------|--------------------------------|
| 1. AC Power Socket | 10. LCD Display |
| 2. Sync Cord Jack | 11. Light Sensor |
| 3. Power Switch | 12. Modeling Lamp Indicator |
| 4. Test Button | 13. Test Indicator |
| 5. MOD/OFF Modeling Lamp Button | 14. Select Dial + SET Button |
| 6. S1/S2 Slave Model Button | 15. Fuse |
| 7. Group/Channel Button | 16. Mounting Bracket |
| 8. BUZZ Button | 17. Umbrella Input |
| 9. Wireless Control Port | 18. Direction Adjusting Handle |

• LCD Panel

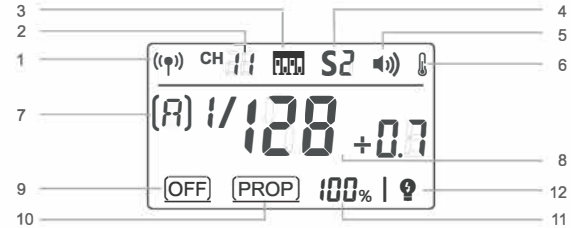

- | | |
|----------------------------------------|----------------------------------------------------|
| 1. Built-in 2.4G Wireless Transmission | 9. Modeling Lamp is off |
| 2. Built-in Wireless Channel | 10. Modeling Lamp is in the PROP mode |
| 3. Built-in Wireless Channel Dial | 11. Modeling Lamp shows the power in percentage |
| 4. Slave Model Indicator | 12. Modeling Lamp is off when triggering the flash |
| 5. Beep | |
| 6. Temperature Alarm Display | |
| 7. Built-in Wireless Group | |
| 8. Flash Output | |


• Accessories

1. Power Cord
2. Lamp Cover
3. Glass Protection Cover
4. Modeling Lamp
5. Instruction Manual



• Separately sold accessories

The product can be used in combination with the following accessories sold separately, so as to achieve best photography effects: X1, XT16 or FT-16 remote control, Power Inverter, Softbox, Photographic Umbrella, Light Stand, Barndoor, Snoot, etc.

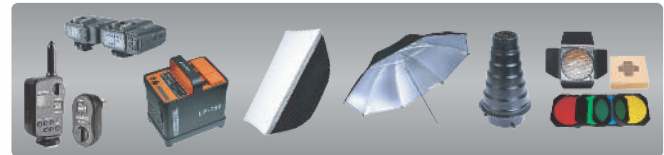

OPERATIONS

Flash Preparation

1. Take down the lamp cover. Install the modeling lamp and put on the glass protection cover and the standard reflector

(optional accessory).

(To uninstall the standard reflector, press the release button on the flash head and turn the standard reflector counter-clockwise to take it out, as illustrated in the picture.)



2. Attach the flash unit onto an appropriate light stand. Adjust the mounting bracket (16) for a good angle and make sure it is tightened and fixed. Use the direction adjusting handle (18) to adjust the flash to a desired direction. Umbrella input (17) is for different photo umbrellas to put in.

Power Connection

Use the power cord to connect the flash to an AC power source and turn on the power switch (3).

Modeling Lamp

Short press the Modeling Lamp Button (5) to choose the modeling lamp's mode (OFF, PROP and percentage); and long press the Modeling Lamp Button (5) to switch on or off the function that the modeling is off when triggering the flash.

Modeling lamp will be off automatically after lighting for 4 hours, avoiding overheat due to long-time lighting when the user is not nearby.

OFF: Modeling lamp is off.

PROP: The modeling lamp's power changes with the flash's power. The bigger power the flash has, the brighter the modeling lamp is.

Percentage: Adjust the modeling lamp's light brightness manually from 5% to 100%.

Setting:

- When OFF is displayed, short press the <MOD/OFF> Button to enter PROP mode. Now the LCD panel shows PROP.
- When PROP is displayed, short press the <MOD/OFF> Button to enter Percentage mode. Short press the SET Button and the percentage value is blinking. Turn the Select Dial to choose the light brightness from 5% to 100%. Short press the SET Button to exit.

- When PROP is displayed, short press the <MOD/OFF> Button can back to <OFF> mode.
- When in NON OFF mode, long press the <MOD/OFF> Button for 2 seconds to switch on the function that the modeling is off when triggering the flash. Now the LCD panel shows (?). Long press the <MOD/OFF> Button again to exit this mode.



When there is flammable accessory on the flash unit, do not keep the modeling lamp on for a long time. It is recommended to cool it down for one minute after 10 minutes' working.

Power Output Control

Select dial (14) decides different power output, satisfying light requirements in different environment. The power is adjustable freely from 1/32 to 1/1 which will be accordingly shown on the LCD display (10). "--" on the display indicates that the flash triggering function is turned off. Press the test button to discharge power when the flash output is adjusted from high to low.

Test Button

To fire the flash without taking a picture, press the test button (4). It can also help adjust the flash brightness when combined with the select dial (14). Press the SET button and turn on the flash to view its version.

Sync Triggering

The sync cord jack (2) is a $\Phi 3.5\text{mm}$ plug. Insert a trigger plug here and the flash will be fired synchronously with the camera shutter.

Synchronously press the S1/S2 button and BUZZ button to recover factory settings.



GR/CH Button

Short press the GR/CH button can adjust the built-in wireless group. When the group indicator on the LCD panel is blinking, turn the select dial to change. And long press the GR/CH button can adjust the built-in wireless channel. When the channel indicator on the LCD panel is blinking, turn the select dial to change.

• Slave Trigger Model

Three slave triggering models are available and can be set by pressing slave model button (6).

◆No optical control: S1 or S2 is not displayed on the LCD panel, indicating the flash triggering function is shut down.

◆Optic S1 Secondary Unit Setting: In M manual flash mode, press <S1/S2> button so that this flash can function as an optic S1 secondary flash with optic sensor. With this function, the flash will fire synchronously when the main flash fires, the same effect as that by the use of radio triggers. This helps create multiple lighting effects.

◆Optic S2 Secondary Unit Setting: Press <S1/S2> button so that this flash can also function as an optic S2 secondary flash with optic sensor in M manual flash mode. This is useful when cameras have pre-flash function. With this function, the flash will ignore a single "preflash" from the main flash and will only fire in response to the second, actual flash from the main unit.

• Buzz Function

The BUZZ button (8) is used for deciding whether there is sound reminder for ready flash after recharging. When the buzz indicator is on the LCD panel, the buzz function is working; when it is disappear, the buzz function is not working. A "BI" sound will be heard when it's fully charged.

• Key Combination

Synchronously press the <GR/CH> Button and the <S1/S2> Button can turn on/off the built-in wireless transmission. If there are no wireless and channel indicators displayed on the LCD panel, the built-in wireless transmission is off. On the contrary, the built-in wireless transmission is on.

• Alarm Display

E0 The temperature sensor is not connected.

E1 When charging, the capacitance and voltage are not rising within 1 second.

E2 The fastest heating-up component is over the extra temperature.

E3 Discharged capacitance and voltage > rating +10%

Alarm sounds, BIBI, ringing per 0.5 second. Press SET button to stop alarming.

• Memory Function

The device is equipped with memory function for the panel setting. It will help remember the panel setting 3 seconds after you set it. When starting up the flash next time, the panel setting will be the same as that before powering it off.

• Wireless Control Function

The flash unit has built-in 2.4G wireless transmission, which can be used together with X1 and XT16 flash trigger.


Synchronously press the <GR/CH> Button and the <S1/S2> Button can turn on the built-in wireless transmission and the <W> is displayed. If there are other wireless flash systems nearby, you can change the channel IDs to prevent signal interference. The channel IDs of the master unit and the slave unit(s) must be set to the same.

Setting the Communication Channel



- 1 Long press the <GR/CH> Button for 2 seconds until the channel IDs is blinking.
- 2 Turn the Select Dial to choose the channel from 1 to 32.
- 3 Press the <SET> Button to confirm.

Setting the Communication Group

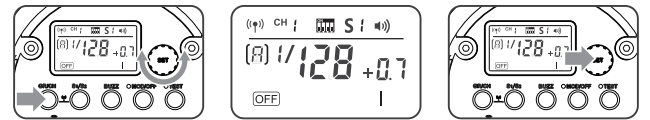

- 1 Short press the <GR/CH> Button for 2 seconds until the group IDs is blinking.
- 2 Turn the Select Dial to choose the group from 0 to F.
- 3 Press the <SET> Button to confirm.

Warning

Operating frequency:433.05MHz – 434.79MHz /2412.99MHz – 2464.49MHz(only receive)

Declaration of Conformity

GODOX Photo Equipment Co.,Ltd. hereby declares that this equipment are in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU. In accordance with Article 10(2) and Article 10(10), this product is allowed to be used in all EU member states.For more information of DoC, Please click this web link:

https://www.godox.com/DOC/GoDox_QSII_Series_DOC.pdf

The device complies with RF specifications when the device used at 0mm from your body.

The flash unit is built in with a Wireless Control Port so that you can wirelessly adjust the power level of the flash and the flash triggering. To control the flash wirelessly, you need a FT-16 remote control set (on-camera and on-flash). Insert its receive end into the Wireless Control Port on the flash and insert the transmit end into the camera hot shoe. Settings made on the hotshoe-mounted transmit and receive ends will be wirelessly communicated to the flash. Then you can press the camera shutter release button to trigger the flash. You can also hold the transmit end at hand to control your off-camera flash.



For full instructions on the use of FT series remote control, see its user manual.

• Tube Replacement

Shut down the power and remove the power cord before replacing the flash tube and wear insulated gloves. Then, loosen the iron wire on the tube, keep a balanced hold on the two feet of the flash tube and pull out the old tube gently. Take down the feet casing from the old tube and put it on the new one. Hold two feet of the new tube, and target directly towards the two copper outlets, then push them slightly in. Twine the iron wire on the stainless steel sheet to fix the flash tube.



TECHNICAL DATA

Model	QS400II	QS600II	QS800II	QS1200II
Max Power (WS)	400Ws	600Ws	800Ws	1200Ws
Guide Number(m ISO 100)	65	76	90	110
Color Temperature	5600±200K			
Operating Voltage	AC110V-120V~60Hz or AC220V-240V~50Hz			
Power Output Control	OFF, 5.0~8.0(1/32~1/1)			
Modeling Lamp (W)	150W			
Recycle Time	0.3-1.5s			
Triggering Method	Sync cord, Test button, Slave triggering, Wireless control port			
Flash Duration	1/2000~1/800s			
Parameters output from the sync cord jack	5V			
Parameters output from the USB port	5V/200mA (only for Godox receiver)			
Fuse	AC220V-240V~50Hz: 5A	AC220V-240V~50Hz: 8A	AC220V-240V~50Hz: 10A	
	AC110V-120V~60Hz: 10A		AC110V-120V~60Hz: 15A	
Dimension	Flash diameterΦ14cm, height of flash with handle 26cm			
	length of flash with lamp cover 41cm		length of flash with lamp cover 51.15cm	
Net Weight	Approx. 2.75kg	Approx.2.91kg	Approx.3.9kg	Approx.4.3kg

MAINTENANCE

- Shut down the device immediately when it works abnormally and find out the reason.
- Avoid sudden impacts and the lamp should be dedusted regularly.
- It is normal for the lamp to be warm when in use. Avoid continuous flashes if unnecessary.
- Maintenance of the flash must be performed by our authorized maintenance department which can provide original accessories. The flash-tube and the modeling lamp are user-replaceable.
- Replacement tubes and lamps can be obtained from the manufacturer.
This product, except consumables e.g. flash tube and modeling lamp, is supported with a one-year warranty.
- Unauthorized service will void the warranty.
- If the product had failures or was wetted, do not use it until it is repaired by professional.
- Disconnect the power when cleaning the flash or when changing the flashtube / modeling lamp.
- Changes made to the specifications or designs may not be reflected in this manual.

Warranty

Dear customers, as this warranty card is an important certificate to apply for our maintenance service, please fill in the following form in coordination with the seller and safe-keep it. Thank you!

Product Information	Model	Product Code Number
Customer Information	Name	Contact Number
	Address	
Seller Information	Name	
	Contact Number	
	Address	
	Date of Sale	
Note:		

Note: This form shall be sealed by the seller.

Applicable Products

The document applies to the products listed on the **Product Maintenance Information** (see below for further information). Other products or accessories (e.g. promotional items, giveaways and additional accessories attached, etc.) are not included in this warranty scope.

Warranty Period

The warranty period of products and accessories is implemented according to the relevant Product Maintenance Information. The warranty period is calculated from the day (purchase date) when the product is bought for the first time. And the purchase date is considered as the date registered on the warranty card when buying the product.

How to Get the Maintenance Service

If maintenance service is needed, you can directly contact the product distributor or authorized service institutions. You can also contact the Godox after-sale service call and we will offer you service. When applying for maintenance service, you should provide valid warranty card. If you cannot provide valid warranty card, we may offer you maintenance service once confirmed that the product or accessory is involved in the maintenance scope, but that shall not be considered as our obligation.

Inapplicable Cases

The guarantee and service offered by this document are not applicable in the following cases: ①. The product or accessory has expired its warranty period; ②. Breakage or damage caused by inappropriate usage, maintenance or preservation, such as improper packing, improper usage, improper plugging in/out external equipment, falling off or squeezing by external force, contacting or exposing to the improper temperature, solvent, acid, base, flooding and damp environments, etc; ③. Breakage or damage caused by non-authorized institution or staff in the process of installation, maintenance, alternation, addition and detachment; ④. The original identifying information of product or accessory is modified, alternated, or removed; ⑤. No valid warranty card; ⑥. Breakage or damage caused by using illegally authorized, nonstandard or non-public released software; ⑦. Breakage or damage caused by force majeure or accident; ⑧. Breakage or damage that could not be attributed to the product itself. Once met these situations above, you should seek solutions from the related responsible parties and Godox assumes no responsibility. The damage caused by parts, accessories and software that beyond the warranty period or scope is not included in our maintenance scope. The normal discoloration, abrasion and consumption are not the breakage within the maintenance scope.

Maintenance and Service Support Information

The warranty period and service types of products are implemented according to the following **Product Maintenance Information**:

Product Type	Name	Maintenance Period(month)	Warranty Service Type
Parts	Circuit Board	12	Customer sends the product to designated site
	Battery	3	Customer sends the product to designated site
	Electrical parts e.g.battery charger, power cord, sync cable, etc.	12	Customer sends the product to designated site
Other Items	Flash tube, modeling lamp, lamp body, lamp cover, locking device, package, etc.	No	Without warranty

Godox After-sale Service Call +86-755-29609320-8062